




*For Smarter Growing*



## AGR-2X315CMH

AVOVOgrow 2X315CMH Grow Light System is designed to deliver intense and even light spread to your plants. These units utilize advanced low frequency square wave technology and high efficiency 2X315W ceramic metal halide grow lamps. The premium hammertone reflector design promotes optimal cross lighting and PPFD. The fixture case and reflector have been designed for better heat redistribution to keep your fixtures classic and cool. The AGR-2X315CMH Grow Light System offers ultimate control of spectral output with two horizontally placed lamps that allow the ability to mix spectrums for an optimal full phase spectrum and maximum the harvests potential.

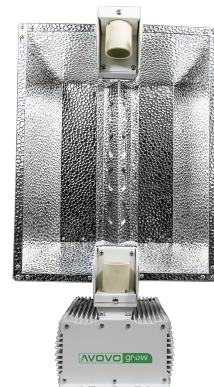

## SPECIFICATION

Model Number	AGR-2X315CMH
Input Volts/Current	120-240V/5.78A-2.86A
	347V/1.98A
Main Frequency	50/60HZ
Operation Frequency	140-220HZ
Lamp Base	PGZX18
Input Power	686W
Min Power Factor	0.96
THD	<15%
Crest Factor	<1.7
Max Allowable Case Temp.	75°C
Ignition Voltage	5kV max

## PROTECTIONS

1. End of Lamp Life(EOL) protection
2. Ignition failure protection
3. Short circuit protection
4. Open circuit protection
5. Thermal protection

Available with AVOVOgrow CMH lamps (can be mixed):


**CMH315W-4200K** ( most for vegetative )

**CMH315W-3100K** ( most for flowering )

**CMH315W-3000K-R** ( most for flowering )



## DIMENSIONS

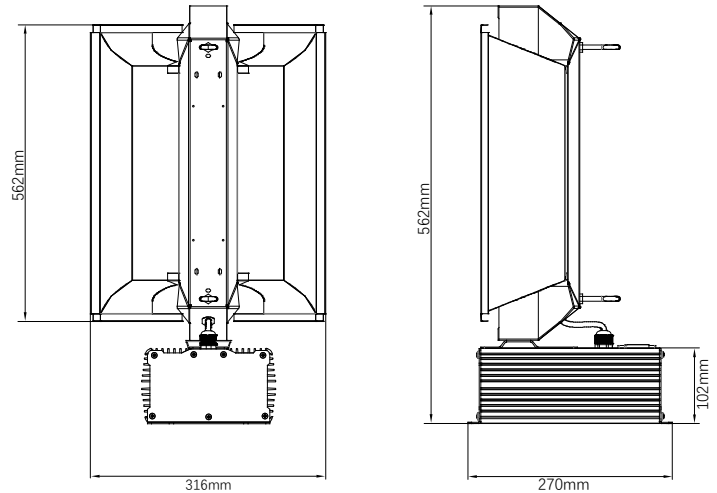

## FEATURES

- Integrated Horticultural Lighting
- Professional low frequency electronic ballast
- High efficiency premium+ hammertone reflector
- Easy play plug or connectors and 3m power cord
- Input Voltage AC120-240V or AC347V
- Input Frequency 50/60Hz
- Intelligent Self Diagnostic System
- Soft start and Staggered ignition to protect lamp
- Active PFC 0.99 (Max) High efficiency, Low THD
- Multiple Protections OVP, UVP, OTP, SCP, OCP
- Completely silent in operation

